

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 December 2001 (13.12.2001)

PCT

(10) International Publication Number
WO 01/93684 A2

(51) International Patent Classification⁷: **A01N 47/44**,
C02F 1/50 // (A01N 47/44, 33:12, 33:04)

(21) International Application Number: PCT/GB01/02362

(22) International Filing Date: 29 May 2001 (29.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/209,230 2 June 2000 (02.06.2000) US

(71) Applicant (for all designated States except MN, US): **AVECIA INC.** [US/US]; 1405 Foulk Road, Wilmington, DE 19803 (US).

(71) Applicant (for MN only): **AVECIA LIMITED** [GB/GB]; P.O. Box 42, Hexagon House, Blackley, Manchester M9 8ZS (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **UNHOCH, Michael, Joseph** [US/US]; 235 Cherry Lane, Newcastle, DE 19720 (US). **VORE, Roy, Dean** [US/US]; 235 Cherry Lane, Newcastle, DE 19720 (US).

(74) Agents: **REVELL, Christopher** et al.; Intellectual Property Group, Avecia Limited, P.O. Box 42, Hexagon House, Blackley, Manchester M9 8ZS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TREATMENT OF CIRCULATING WATER SYSTEMS



(57) Abstract: The present invention relates to a method of inhibiting the growth of killing algae, bacteria, yeast and/or fungi in a recirculating water system which comprises adding to the water a polymeric biguanide and an adjuvant of the Formula (1) or a salt thereof: wherein: R¹ is an optionally substituted C₈ to C₁₂ or C₁₈ to C₂₂ alkyl group; and R² and R³ each independently is H or optionally substituted C₁₋₄-alkyl.

BEST AVAILABLE COPY

WO 01/93684 A2

TREATMENT OF CIRCULATING WATER SYSTEMS

FIELD OF INVENTION

This invention relates to a method for inhibiting the growth of or killing microorganisms such as algae, bacteria, yeast and/or fungi in a recirculating water system, to treated recirculating water systems and to compositions and kits suitable for use in the method.

BACKGROUND OF THE INVENTION

The water in many industrial and recreational recirculating water systems such as cooling towers, swimming pools, spas, ornamental ponds, plumbing, pipework and other surfaces and the like is susceptible to infection by microorganisms such as bacteria, algae, yeast and fungi. These organisms may be pathogens or potential pathogens. Thus, for safety reasons, it is highly desirable to control their growth by the addition to the water of sanitizing agents. It is also desirable for aesthetic reasons, to control the growth of non-pathogenic bacteria, algae, yeast and fungi, particularly the so-called "nuisance" algae, yeast and fungi which cause discoloration and/or staining of the water and surfaces in contact with the water

A variety of sanitising agents have been employed for controlling undesirable micro-organisms in recreational recirculating water systems. The most common sanitising agents provide free chlorine and/or bromine (typically at a concentration in the water of 1 to 5 ppm free halogen). Chlorine may be provided either directly as chlorine gas or sodium or calcium hypochlorite or via a chlorine release agent such as a chlorinated isocyanurate or chlorinated and brominated hydantoin. Chlorine may also be liberated in situ by electrolysis of sodium chloride. Other sanitising agents which have been used in such systems include ozone, ozone forming chemicals, hydrogen peroxide, hydrogen peroxide forming chemicals, copper and/or silver salts which provide copper, silver or chelated copper ions (typically at a concentration in the water of 0.1 to 1.0 ppm), quaternary amines and polymeric biguanides, especially poly(hexamethylene biguanide) (hereinafter referred to as PHMB) which is typically used at a concentration in recreational water of 6-10 ppm. Systems employing ultra violet light have also been used to sanitise recirculating water. Sanitising agents are used at higher concentrations in industrial recirculating water systems and additional sanitising agents may be used including but not limited to 2-methylisothiazolinone, 5-chloro-2-methylisothiazolinone, benzisothiazolinone, 2-bromo-2-nitropropane-1,3-diol, 1,2-dibromo-2,4-dicyanobutane, methylene bithiocyanate, 2-(thiocyanomethylthio)-benzothiazole, formaldehyde and formaldehyde release agents, glutaraldehyde, dibromonitripropionamide and bromo-hydroxyacetophenone or mixtures thereof.

Although these primary sanitising agents are very effective in controlling bacteria they do not always provide consistent control of the so called "nuisance" algae, yeast and fungi which can cause discoloration and/or staining of the water and surfaces in contact with the water.

5 Examples of "nuisance" algae which are found in swimming pools include eukaryotic and prokaryotic algae, for example green algae (e.g. *Chlorella* spp.), black algae (e.g. *Phormidium* spp.) and mustard algae (e.g. *Eustigmatos* spp.). Of these, we have found that mustard algae are particularly difficult to control, regardless of the type of primary sanitising agent used. They appear as slimy deposits attached to the pool sides and bottom, as well as in the plumbing and in the filter, and vary in colour from dark green to brown.

10 Examples of "nuisance" fungi (often referred to as mold) isolated from swimming pools include *Aspergillus* spp., *Cladosporium* spp., *Mucor* spp. and *Paecilomyces* spp. *Paecilomyces lilacinus* is the causative agent in so-called "water mold", "pink mold" and "pink algae". *P. lilacinus* can manifest itself as white, grey or pink slimy deposits that are found in niches such as under ladder steps, in skimmer and pump baskets, in filters and piping. *P. lilacinus* is also found growing in recirculating water filters where it can have an adverse effect on the efficiency and lifespan of the filter media. In its mature form, the fungus can also attach itself to pool surfaces and cause chronic turbidity problems which are difficult to control.

15 Examples of common "nuisance" yeasts found in swimming pools include *Saccharomyces* and *Candidia* species.

20 The wide spread occurrence of "nuisance" algae and fungi has lead to the introduction of methods of controlling these persistent microbes such as dosing with larger amounts of the sanitiser, shock dosing with chlorine or the introduction of further sanitisers or additives such as chelated copper, copper sulfate, combinations of chlorine and ammonium sulfate, colloidal silver, linear and/or cyclic quaternary amine compounds and polyquaternary amine compounds. However, these methods and algicides/fungicides have shown only limited efficacy against the "nuisance" algae and fungi and can give rise to undesirable levels of foam, especially in re-circulating water systems such as spas. Furthermore, in some circumstances, the additives themselves (especially chelated copper and copper sulphate) can cause staining of surfaces in contact with the water.

25 Any agent to be added to a recreational water system to control bacterial growth and "nuisance" algae, yeast and fungi must meet a number of demanding performance criteria. These include:


- 30 a) an excellent toxicology profile;
b) reasonable solubility;
c) freedom from unpleasant taste;
d) odourless or free from unpleasant odours (post addition);

- e) non-staining of the construction materials e.g. plaster, plastic;
- f) stability to light;
- g) stability to other additives present in the water (e.g. sanitisers, H₂O₂ and EDTA);
- h) little or no effect on foaming; and
- 5 i) no adverse effect on water appearance e.g. discoloration or turbidity.

Thus, there is a need for a method of treating recirculating water systems to control not only the growth of pathogens, potential pathogens and other bacteria, but also the growth of those "nuisance" algae, yeast and/or fungi which persist in the presence of a primary sanitizing agent.

SUMMARY OF THE INVENTION

According to the present invention there is provided a method for inhibiting the growth of or killing microorganisms, particularly bacteria, algae, yeast, and/or fungi in a recirculating water system comprising adding to the water a polymeric biguanide and an adjuvant of the Formula (1) or a salt thereof:



Formula (1)

wherein:

- R¹ is an optionally substituted C₈ to C₁₂ or C₁₈ to C₂₂ alkyl group; and
- 20 R² and R³ each independently is H or optionally substituted C₁₋₄-alkyl.

THE ADJUVANT

The alkyl group represented by R¹ may be a branched chain or more preferably a straight chain alkyl group. It is especially preferred that R¹ is n-octadecyl or more preferably n-dodecyl.

When any of R² and R³ is C₁₋₄-alkyl it may be a branched chain or more preferably a straight chain alkyl group. Examples of suitable alkyl groups include ethyl, n-propyl, iso-propyl and especially methyl. It is preferred however that R² and R³ are H.

The alkyl groups represented by R¹, R² and R³ may be substituted by one or more substituents which do not adversely affect the activity of the adjuvant when used in combination with a polymeric biguanide according to the present invention. Suitable optional substituents include hydroxy, aryl (especially phenyl), amino, C₁₋₄-alkoxy, hydroxy-C₁₋₄-alkoxy or halogen (especially Cl). It is preferred, however that R¹, R² and R³ are un-substituted.

The adjuvant is preferably sufficiently water-soluble to give a concentration thereof in the recirculating water system which is sufficient to inhibit the growth of or kill microorganisms such as bacteria, algae, yeast, and/or fungi present in the recirculating

water system. When the adjuvant is added to a recreational recirculating water system such as a swimming pool or spa it is also preferable that the adjuvant has sufficient water solubility not to adversely effect the appearance of the water in the recirculating water system, for example water colour or clarity.

5 Preferably the adjuvant has a water-solubility of at least 1 ppm, preferably at least 2 ppm, especially at least 5 ppm more especially at least 50 ppm and particularly at least 100 ppm. The upper limit of the adjuvant's water-solubility does not matter, although typically the adjuvant has a water-solubility below 100,000 ppm, more usually below 25,000 ppm.

10 The term "ppm" means parts per million by weight. One may easily determine the water-solubility of an adjuvant in ppm because this is the same as the weight of adjuvant in milligrams which will dissolve in 1 litre of water at 20°C. For example if 10mg of adjuvant dissolves in 1 litre of water at 20°C the water-solubility is 10 ppm.

15 The solubility of many adjuvants is influenced by pH. In a recreational recirculating water system the pH is preferably in the range of from 6.5 to 9.0, more preferably from 6.8 to 8.5 and especially from 7.0 to 8.2. Accordingly the above mentioned preferred solubility of the adjuvant is the solubility in water at the pH of the recirculating water system.

20 The adjuvant is preferably added to the water system to give a concentration thereof in the range 0.1 to 30 ppm, more preferably 0.1 to 24 ppm, more preferably 0.5 to 15 ppm, especially 5 to 15ppm and more especially 6 to 10ppm. These preferred concentrations provide good protection against the growth of microorganisms such as bacteria and nuisance algae, yeasts and fungi. It is especially preferred that the concentration of adjuvant is less than 25ppm, because we have found that in some
25 circumstances a higher concentration of adjuvant can result in water turbidity.

30 In view of the foregoing preferences the adjuvant is preferably selected from the group consisting of dodecylamine, octadecylamine, N,N-dimethyloctadecylamine and salts thereof. It is especially preferred that the adjuvant is dodecylamine or octadecylamine or a salt thereof. More especially the adjuvant is dodecylamine or a salt thereof. Dodecylamine provides good protection against the growth of microorganisms such as bacteria and "nuisance" algae, yeast and/or fungi and does not affect water quality, particularly water clarity.

35 When the adjuvant is used in the form of a salt, the salt may be formed with any anion which does not adversely affect the activity of the adjuvant when used with the polymeric biguanide. Preferably, the salt is an acid addition salt, more preferably a water-soluble acid addition salt. The acid forming the salt may be an inorganic acid or an organic acid. When the acid is an inorganic acid it is preferably hydrochloric acid.

When the salt is formed with an organic acid, the acid may contain a phosphonic, phosphoric, sulphonic or sulphate group but preferably contains a carboxylic acid group.

The organic acid may be aromatic but is preferably aliphatic, including alicyclic. When the organic acid is aliphatic, the aliphatic chain of the organic acid may be linear or branched, saturated or unsaturated, including mixtures thereof. Preferably, the aliphatic chain is linear and it is also preferred that the organic acid is an aliphatic carboxylic acid.

5 It is preferred that the organic acid contains up to 12, more preferably up to 6 carbon atoms excluding the acid group.

The organic acid may contain more than one acid group but it is preferred that only one such group is present.

The organic acid may be substituted by a halogen or particularly a hydroxy group.


10 Suitable aliphatic carboxylic acids from which the salt can be formed include acetic acid, propionic acid, butyric acid, valeric acid, pivalic acid and lauric acid. Suitable aliphatic di-carboxylic acids include oxalic acid, malonic acid, succinic acid and gluconic acid. Suitable hydroxy substituted acids include glycolic acid, lactic acid, glyceric acid, malic acid and tartaric acid.

15 The salts of the adjuvant may be formed using conventional methods, for example by reacting the compound of Formula (1) with the acid optionally in the presence of a solvent. The resulting salt may then be isolated by, for example evaporation. It is preferred that the resulting salt is purified prior to use in the present method to remove undesirable impurities.

20 A single adjuvant or two or more of the adjuvants may be used in the present method. The use of two or more of the adjuvants may advantageously provide a broader spectrum of activity than the use of a single adjuvant.

POLYMERIC BIGUANIDE

25 The polymeric biguanide preferably contains at least two biguanide units of Formula (2):




Formula (2)

30 linked by a bridging group which contains at least one methylene group. The bridging group preferably includes a polymethylene chain, optionally incorporating or substituted by one or more hetero atoms such as oxygen, sulphur or nitrogen. The bridging group may include one or more cyclic moieties which may be saturated or unsaturated. Preferably, the bridging group is such that there are at least three, and especially at least four, carbon atoms directly interposed between two adjacent biguanide units of Formula (2). Preferably, there are not greater than 10 and especially not greater than eight carbon atoms interposed between two adjacent biguanide units of Formula (2).

35


The polymeric biguanide may be terminated by any suitable group, such as a hydrocarbyl, substituted hydrocarbyl or by an amine group or by a cyanoguanidine group of the formula:



When the terminating group is hydrocarbyl, it is preferably alkyl, cycloalkyl, aryl or aralkyl. When the terminating group is substituted hydrocarbyl, the substituent may be any substituent which does not exhibit undesirable adverse effects on the microbiological properties of the polymeric biguanide. Preferred aryl groups include phenyl groups. Examples of suitable substituents are aryloxy, alkoxy, acyl, acyloxy, halogen and nitrile.


When the polymeric biguanide contains two biguanide groups of Formula (2), it is preferred that the two biguanide groups are linked through a polymethylene group, especially a hexamethylene group and the biguanide is a bisbiguanide.

The terminating groups in such bisbiguanides are preferably C₁₋₁₀-alkyl which may be linear or branched and optionally substituted aryl, especially optionally substituted phenyl. Examples of such terminating groups are 2-ethylhexyl and 4-chlorophenyl. Specific examples of such bisbiguanides are compounds represented by Formula (3) and (4) in the free base form:




Formula (3)

and



Formula (4)

The polymeric biguanide preferably contains more than two biguanide units of Formula (2) and is preferably a linear polymeric biguanide which has a recurring polymeric chain represented by Formula (5) or a salt thereof:




Formula (5)

wherein X and Y represent bridging groups which may be the same or different and in which together the total of the number of carbon atoms directly interposed between the


pairs of nitrogen atoms linked by X plus the number of carbon atoms directly interposed between the pairs of nitrogen atoms linked by Y is more than 9 and less than 17.

The bridging groups X and Y preferably consist of polymethylene chains, optionally interrupted by hetero atoms, for example, oxygen, sulphur or nitrogen. X and Y may also incorporate cyclic moieties which may be saturated or unsaturated, in which case the number of carbon atoms directly interposed between the pairs of nitrogen atoms linked by X and Y is taken as including that segment of the cyclic group, or groups, which is the shortest. Thus, the number of carbon atoms directly interposed between the nitrogen atoms in the group

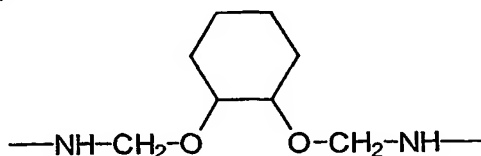


is 4 and not 8.

The linear polymeric biguanides having a recurring polymer unit of Formula (5) are typically obtained as mixtures of polymers in which the polymer chains are of different lengths. Preferably, the number of individual biguanide units of formulae:



is, together, from 3 to about 80.


The preferred linear polymeric biguanide is a mixture of polymer chains in which X and Y are identical and the individual polymer chains, excluding the terminating groups, are of the Formula (6) or a salt thereof:




Formula (6)

wherein n is from 4 to 40 and especially from 4 to 15. It is especially preferred that the average value of n is about 12. Preferably, the average molecular weight of the polymer in the free base form is from 1100 to 3300.

The linear polymeric biguanides may be prepared by the reaction of a bisdicyandiamide having the formula:




with a diamine $H_2N-Y-NH_2$, wherein X and Y have the meanings defined above or by reaction between a diamine salt or dicyanamide having the formula:



with a diamine $H_2N-Y-NH_2$ wherein X and Y have the meanings defined above. These methods of preparation are described in UK specifications numbers 702,268 and 1,152,243 respectively, and any of the polymeric biguanides described therein may be used.

As noted hereinbefore, the polymer chains of the linear polymeric biguanides may be terminated either by an amino group or by a cyanoguanidine group:



This cyanoguanidine group can hydrolyse during preparation of the linear polymeric biguanide yielding a guanidine end group. The terminating groups may be the same or different on each polymer chain.

A small proportion of a primary amine $R-NH_2$, where R represents an alkyl group containing from 1 to 18 carbon atoms, may be included with the diamine $H_2N-Y-NH_2$ in the preparation of polymeric biguanides as described above. The primary amine acts as a chain-terminating agent and consequently one or both ends of the polymeric biguanide polymer chains may be terminated by an $-NHR$ group. These $-NHR$ chain-terminated polymeric biguanides may also be used.

The polymeric biguanides readily form salts with both inorganic and organic acids. Preferred salts of the polymeric biguanide are water-soluble. When the polymeric biguanide is represented by a compound of Formula (3) in the free base form, a preferred water soluble salt is the digluconate. When the polymeric biguanide is represented by a compound of Formula (4) in the free base form, a preferred water soluble salt is the diacetate. When the polymeric biguanide is a mixture of linear polymers represented by Formula (6) in the free base form, the preferred salt is the hydrochloride.

It is especially preferred that the polymeric biguanide is a mixture of linear polymers, the individual polymer chains of which, excluding the terminating groups, are represented by Formula (6) in the hydrochloride salt form. This is commercially available from Avecia Inc. under the trademark BAQUACIL.

The polymeric biguanide is preferably added to the re-circulating water system to give a concentration thereof in the water of from 1 to 20 ppm, more preferably from 4 to 15 ppm, especially from 5 to 12 ppm, more especially from 6 to 10 ppm.

We have found that a combination of a polymeric biguanide (especially PHMB) with an adjuvant of the Formula (1) or a salt thereof provides particularly effective control over the growth of bacteria and nuisance algae, yeast and fungi. Furthermore, the combination of the polymeric biguanide and adjuvant gives a fast rate of kill of undesirable micro-organisms. We have also found that the combination of adjuvant and polymeric biguanide exhibit a high residence time in the water, thereby providing long term protection against the growth of bacteria and nuisance algae. A long residence time is desirable because it reduces the frequency of re-dosing with the polymeric biguanide and/or adjuvant necessary to sustain protection in the recirculating water system.

As hereinbefore mentioned the polymeric biguanide and adjuvant may be added sequentially in any order. However, for ease of dosing it is preferred that they are added together as a composition comprising the polymeric biguanide, the adjuvant and optionally a carrier. The carrier, when present, may be a solid or a liquid medium and may comprise a mixture of one or more solids or liquids.

When the carrier is a solid it is preferably a solid which, when dissolved in the recirculating water system, does not have an adverse effect upon the water, such as discoloration of the water or causing turbidity. It is especially preferred that the solid is a water soluble solid, because this avoids the formation of undesirable deposits in the recirculating water system. Solid carriers which may be used include, but are not limited to kaolin, bentonite, kieselguhr, calcium carbonate, talc, powdered magnesia, china clay or more preferably a water soluble inorganic salt, or a filler conventionally used in the preparation of tablets, such as microcrystalline cellulose, lactose and mannitol.

When the carrier is a solid the adjuvant and polymeric biguanide may be simply mixed with the carrier to provide a powder formulation which can be added directly to the recirculating water system. Alternatively, the powder may be encapsulated in a water-soluble capsule, for example as is commonly used for encapsulating pharmaceuticals. This has the advantage that dosing of the powder is easily controlled, for example a single capsule can be filled with sufficient powder to give an effective concentration of the polymeric biguanide and adjuvant in the recirculating water system.

In an embodiment of the invention the polymeric biguanide and adjuvant may be used in the form of a tablet. Suitable tablet formulations include those commonly used for dispensing pharmaceuticals. The tablets may contain a number of components commonly used in the art of tablet formulation, for example, fillers, binders, and excipients.

When the carrier is a liquid medium, the composition is preferably a solution, suspension, emulsion, dispersion or micro-emulsion of the polymeric biguanide and adjuvant in the liquid medium.

The liquid medium is preferably water, a water-miscible organic solvent or more preferably a mixture of water and one or more water-miscible organic solvents.

Suitable water-miscible organic solvents include alcohols, preferably C₁₋₆-alkanols, for example methanol, ethanol, propanol and isopropanol; diols, preferably diols having from 2 to 12 carbon atoms, for example pentane-1,5-diol, ethylene glycol, propylene glycol, butylene glycol, pentylene glycol, hexylene glycol and thiodiglycol; oligo- and poly-alkyleneglycols, for example diethylene glycol, triethylene glycol, dipropylene glycol, polyethylene glycol (preferably with an average M_n < 1000, more preferably <500) and polypropylene glycol (preferably with an average M_n <1000); triols, for example glycerol and 1,2,6-hexanetriol; mono-C₁₋₄-alkyl ethers of diols, preferably mono-C₁₋₄-alkyl ethers of diols having 2 to 12 carbon atoms, for example 2-methoxyethanol, 2-(2-methoxyethoxy)ethanol, 2-(2-ethoxyethoxy)-ethanol, 2-[2-(2-methoxyethoxy)ethoxy]ethanol, 2-[2-(2-ethoxyethoxy)-ethoxy]-ethanol and ethyleneglycol monoallylether; amides, for example N,N-dimethylformamide; cyclic amides, for example N-methyl-2-pyrrolidone, N-ethyl-2-pyrrolidone and 2-pyrrolidone; and sulphoxides, for example, dimethylsulphoxide; carboxylic acids, for example saturated and unsaturated aliphatic monocarboxylic or dicarboxylic acids for example methanoic, ethanoic, propanoic, butanoic, 2-methylpropanoic, pentanoic, 3-methylbutanoic, 2,2-dimethylpropanoic, dodecanoic, tetradecanoic, hexadecanoic, octadecanoic, ethandioic, propanedioic, butanedioic, pentandioic, hexanedioic, heptanedioic, octanedioic, nonanedioic, and decanedioic acid, unsaturated aliphatic acid for example propenoic, propynoic, 2-methylpropenoic, trans and cis-2-butenoic, trans and cis-9-octadecanoic, trans and cis-butenoic and cis-methylbutenedioic, C₁₋₆-alkanols and C₁₋₆ saturated carboxylic acids are particularly preferred. Especially preferred water-miscible organic solvents include acetic acid, propanoic acid and ethanol.

If the formulation is in the form of a suspension, dispersion or emulsion, it preferably also contains a surface active agent to produce a stable dispersion or to maintain the non-continuous phase uniformly distributed throughout the continuous phase. Any surface active agent which does not have a significantly adverse effect on the biocidal activity of the adjuvant and polymeric biguanide may be used. Suitable surface active agents include emulsifiers and surfactants and mixtures thereof. The emulsifiers/surfactants may be non-ionic, anionic or a mixture thereof. Suitable anionic emulsifiers and surfactants include alkylarylsulfonates (for example calcium dodecylbenzenesulfonate), alkylsulfates (for example sodium dodecylsulfate), sulfosuccinates (for example sodium dioctylsulfosuccinate), alkylethersulfates, alkylarylethersulfates, alkylether carboxylates, alkylarylethercarboxylates, lignin sulfonates or phosphate esters. Suitable non-ionic emulsifiers and surfactants include fatty acid ethoxylates, ester ethoxylates, glyceride ethoxylates (for example castor oil ethoxylate), alkylaryl polyglycol ethers (for example nonylphenol ethoxylates), alcohol ethoxylates, propylene oxide-ethylene oxide condensation products, amine ethoxylates, amide ethoxylates, amine oxides, alkyl polyglucosides, sorbitan fatty acid esters,

polyoxyethylene sorbitan fatty acid esters, polyoxyethylenesorbitol esters or alcohol ethoxy carboxylates, especially those obtainable from C₁₂₋₁₄-alcohols.

The weight ratio of the polymeric biguanide : adjuvant may vary over wide limits, but in many embodiments is from 99:1 to 1:99, preferably from 4:1 to 1:4, more preferably from 1:2 to 2:1. It is especially preferred that the weight ratio of the polymeric biguanide to adjuvant is from 1:1 to 2:1.

Further improvements in the efficacy of the present method may be achieved by adding the adjuvant and polymeric biguanide to the recirculating water system in conjunction with one or more further antimicrobial compound(s). The addition of further antimicrobial compound(s) to the recirculating water system can provide a broader spectrum of antimicrobial activity and/or provide increased efficacy against particularly problematic algae, bacteria, yeast and/or fungi present in the recirculating water system. Furthermore, the combination of the adjuvant compound the polymeric biguanide and one or more further antimicrobial compound(s) may provide a synergistic effect.

The further antimicrobial compound(s) may possess anti-bacterial, anti-fungal, anti-algal or other antimicrobial activity. Suitable further anti-microbial compounds include agricultural fungicides, agricultural herbicides, algicides, sanitises, disinfectants or quaternary ammonium compounds and combinations thereof.


When the further antimicrobial compound is a sanitising agent the choice of sanitising agent will depend upon the recirculating water system in which it will be used. For recreational waters, suitable sanitising agents include for example chlorine, bromine, ozone, hydrogen peroxide, calcium hypochlorite, sodium hypochlorite, lithium hypochlorite, a chlorine release agent (preferably a chlorinated isocyanurate, or a chlorinated hydantoin, more preferably dichlorocyanuric acid or trichlorocyanuric acid), a bromine release agent, a hydrogen peroxide release agent, an ozone release agent or water-soluble copper or silver or chelated copper salts, (e.g. copper sulphate, chelated copper sulphate). In industrial recirculating water systems where the toxicity of the sanitising agent is not so important, other sanitisers may also be suitable for example 2-methylisothiazolinone, 5-chloro-2-methylisothiazolinone, benzisothiazolinone, 2-bromo-2-nitropropane-1,3-diol, 1,2-dibromo-2,4-dicyanobutane, methylene bithiocyanate, 2-(thiocyanomethylthio)-benzothiazole, formaldehyde and formaldehyde release agents, glutaraldehyde, dibromonitripropionamide and bromo-hydroxyacetophenone or mixtures thereof.

When the further antimicrobial compound is a quaternary ammonium compound it may be a compound with a single quaternary ammonium group or a polyquaternary ammonium compound. Examples of suitable quaternary ammonium compounds include for example, N,N-diethyl-N-dodecyl-N-benzylammonium chloride, N,N-dimethyl-N-octadecyl-N-(dimethylbenzyl)ammonium chloride, N,N-dimethyl-N,N-didecylammonium chloride, N,N-dimethyl-N,N-didodecylammonium chloride; N,N,N-trimethyl-N-

tetradecylammonium chloride, N-benzyl-N,N-dimethyl-N-(C₁₂-C₁₈alkyl)ammonium chloride, N-(dichlorobenzyl)-N,N-dimethyl-N-dodecylammonium chloride, N-hexadecylpyridinium chloride, N-hexadecylpyridinium bromide, N-hexadecyl-N,N,N-trimethylammonium bromide, N-dodecylpyridinium chloride, N-dodecylpyridinium bisulphate, N-benzyl-N-dodecyl-N,N-bis(beta-hydroxy-ethyl)ammonium chloride, N-dodecyl-N-benzyl-N,N-dimethylammonium chloride, N-benzyl-N,N-dimethyl-N-(C₁₂-C₁₈ alkyl) ammonium chloride, N-dodecyl-N,N-dimethyl-N-ethylammonium ethylsulphate, N-dodecyl-N,N-dimethyl-N-(1-naphthylmethyl)ammonium chloride, N-hexadecyl-N,N-dimethyl-N-benzylammonium chloride or N-dodecyl-N,N-dimethyl-N-benzylammonium chloride.

In a preferred embodiment the further antimicrobial compound is a polyquaternary ammonium compound. Antimicrobial polyquaternary ammonium compounds which may be used include those described in U.S. Pat. Nos. 3,874,870, 3,931,319, 4,027,020, 4,089,977, 4,111,679, 4,506,081, 4,581,058, 4,778,813, 4,970,211, 5,051,124, 5,093,078, 5,142,002 and 5,128,100 which are incorporated herein by reference thereto.

Especially preferred polyquaternary compounds comprise a repeat unit of the Formula (7):



Formula (7)

wherein:

R⁴, R⁵, R⁶ and R⁷ each independently is C₁₋₆-alkyl optionally substituted by hydroxy;

Q²⁻ is a divalent counter ion, two monovalent counter ions or a fraction of a polyvalent counter ion sufficient to balance the cationic charge in the repeat unit; and

a, b and t each independently is 1 to 4.

Preferably Q²⁻ is two monovalent anions selected from a halide anion and a trihalide anion, more preferably chloride or bromide.

R⁴, R⁵, R⁶ and R⁷ are preferably each independently C₁₋₄-alkyl, more preferably methyl.

a, b and t are preferably each independently 1, 2 or 3. It is especially preferred that a, b and t are 2.

The polyquaternary ammonium compound with the repeat unit of Formula (7) preferably has a average molecular weight of from 1,000 to 5,000. An especially preferred polyquaternary ammonium compound with a repeat unit of Formula (7) is poly(oxyethylene-(dimethyliminio)ethylene(dimethyliminio)ethylenedichloride). This

polymer is commercially available under the Trademark WSCP from Buckman Laboratories Inc.

We have found that the use of a polyquaternary ammonium (especially poly(oxyethylene-(dimethyliminio)ethylene(dimethyliminio)ethylene dichloride)) in addition to the polymeric biguanide and adjuvant provides good protection against the growth of algae, especially those commonly found in recreational waters such as swimming pools. This combination is particularly useful as a remedial treatment for algal blooms in recreational waters.

When the further antimicrobial compound is a polyquaternary ammonium compound it is convenient to add the adjuvant and polyquaternary ammonium compound to the recirculating water system together as a formulation. Such formulations are commercially available, for example Busan 20/20™ (ex Buckman Laboratories Inc.) is a formulation comprising poly(oxyethylene-(dimethyliminio)ethylene(dimethyliminio)ethylene dichloride) and a salt of dodecylamine.

Alternatively, the further antimicrobial compound may be added to the recirculating water system together with the adjuvant and polymeric biguanide together as a composition comprising optionally a carrier. The carrier, when present, may be a solid or a liquid medium. Suitable solid and liquid carriers which may be employed are as previously described. When a further antimicrobial compound is present in such a composition, the further antimicrobial compound typically comprises from 5 to 50%, and preferably from 10 to 30% by weight of the composition.

THE RECIRCULATING WATER SYSTEM

The invention is applicable to any industrial or recreational recirculating water system but is especially suitable for recreational recirculating water systems. Examples of industrial water systems include heating and cooling systems, e.g. cooling towers and domestic central heating systems. Examples of recreational recirculating water systems include swimming pools, spas and ornamental ponds. The invention is also applicable to plumbing, pipework and other surfaces which form part of the industrial or recreational recirculating water systems and which are susceptible to infection by microorganisms.

BEST MODE

A preferred embodiment comprises a method for inhibiting the growth of or killing microorganisms, particularly algae, bacteria, yeast, and/or fungi in a recirculating water system, preferably a recreational recirculating water system, comprising adding to the water in either order or simultaneously:

- (i) dodecylamine or a salt thereof ; and
- (ii) a polymeric biguanide, especially PHMB;

wherein the dodecylamine adjuvant is added to the water system to give a concentration thereof of from 0.1 to 24ppm, preferably 0.5 to 15 ppm, more preferably 6 to 15 ppm and especially 6 to 10ppm, and the polymeric biguanide is added to the water system to give a concentration thereof of from 1 to 20 ppm, preferably 5 to 12ppm more preferably 6 to 10ppm.

The combination of components (i) and (ii) provides very effective protection against the growth of microorganisms such as bacteria and "nuisance" algae, yeast and/or fungi without affecting water quality, especially water clarity.

RECIRCULATING WATER SYSTEMS

According to a second aspect of the present invention there is provided a recirculating water system comprising (i) water, an adjuvant of the Formula (1) as hereinbefore defined and a polymeric biguanide; and (ii) a means for recirculating the water; wherein the adjuvant and polymeric biguanide are dissolved in the water.

The preferred adjuvant and polymeric biguanide, their preferred amounts and the preferred water systems are as defined above in relation to the first aspect of the present invention.

The preferred means for recirculating the water comprises a pump.

COMPOSITION

According to a third aspect of the present invention there is provided a composition comprising:

- (i) an adjuvant of the Formula (1) as hereinbefore defined;
- (ii) a polymeric biguanide; and
- (iii) optionally a carrier.

The preferred adjuvants, polymeric biguanides and carriers, and weight ratio of polymeric biguanide : adjuvant are as hereinbefore described in relation to the first aspect of the present invention.

In a preferred embodiment of the invention the composition comprises:

- (a) from 10 to 60 parts of a mixture comprising the compound of Formula (1) and a polymeric biguanide; and
- (b) from 40 to 90 parts of a carrier wherein the parts (a) and (b) are by weight and the sum of the parts (a) and (b) = 100.

Preferably the compositions comprises:

- (a) from 5 to 30, more preferably 10 to 20 weight % of the compound of Formula (1) and from 5 to 30, more preferably 10 to 20 weight % of polymeric biguanide; and
- (b) from 90 to 60 more preferably 80 to 40 weight % of carrier.

The compositions may be used to treat recirculating water systems, for example industrial and recreational recirculating water systems.

KITS

According to a fourth aspect of the present invention there is provided a kit for treating recirculating water comprising:

(i) an adjuvant of the Formula (1) as hereinbefore defined;

5 (ii) a polymeric biguanide; and

(iii) instructions for adding (i) and (ii) to a recirculating water system, preferably to a swimming pool, spa or ornamental pond. The instructions preferably comprise instructions to use (i) and (ii) for inhibiting the growth of and/or killing microorganisms such as algae, bacteria, yeast and/or fungi.

10 The invention is further illustrated by the following examples in which all parts and percentages are by weight unless otherwise indicated.

Examples 1 to 6: Preventative Laboratory Studies on Algae**Pre-amble**

15 Preventative treatments, as the name implies, are intended to prevent an outbreak occurring. Without adequate control measures, outbreaks can occur in two different scenarios. In the first scenario, the organism is present at all times but the concentration of the organism is so low that it is not noticeable. If a triggering event occurs, the organism reproduces rapidly resulting in a "bloom". Examples of triggering events are pH
20 shifts, disturbance of a harbouring biofilm in the filter or plumbing, and introduction of additional but previously limited nutrients, such as nitrogen.

In the second scenario, low numbers of organisms can be introduced into a previously non-colonized pool that having optimal growth conditions. The combination of organisms and optimal growth conditions can result in a "bloom". The organisms can be
25 introduced by the fill water, atmospheric dust, rainfall, or by bathing suits which have been previously used in infected pools or rivers and not washed before re-use.

In preventative laboratory treatment studies, growth conditions are optimised to support a bloom. An experimental flask is prepared with a medium having optimised growth conditions to support a bloom, the medium in the flask is treated with a prescribed
30 concentration of a test formulation, and then inoculated with a low concentration of a bloom-forming organism. The medium is monitored for a period of time to observe whether the formulation is effective at preventing an algal bloom.

These studies used the most problematic organisms, i.e. field isolated mustard algae. Any compound that shows good efficacy against such organisms would be
35 expected to provide even better control against the less environmentally-robust green and black algae.

Experimental

A series of inocula of naturally occurring mustard algae was prepared by inoculating flasks of modified Jaworski's medium with un-purified wild algal isolates collected in the field and containing low levels of bacteria and culturing the flasks for two weeks. The Jawaorski's medium was modified by the addition of 4 ppm polyhexamethylene biguanide (PHMB) (ex Avecia Inc.) to inhibit the growth of the bacteria present in the algal isolates. The inocula were harvested by aseptic vacuum filtration and the concentration of algal cell masses were combined ("pooled") and redispersed in a aseptic medium to provide a concentrated pooled inoculum. The amount of inoculum used was varied to achieve an initial optical density of 0.010 in the test flasks. The optical density was determined using a Milton Roy Spec 20 spectrophotometer.

Test adjuvants and Busan 20/20™ (ex Buckman Laboratories Inc. a mixture of dodecylamine and a polyquaternary ammonium compound (WSCP™)) were assessed, in triplicate, for anti-algal activity and a blank control, by adding each adjuvant or known Busan 20/20™ at 0 ppm and 15 ppm to Jaworski's medium (50 ml) contained in 125 ml flasks containing 6 mm borosilicate beads (50). Each flask was then inoculated with a prescribed amount of the pooled inoculum, so that the liquid in the flask had no visible green cast. The flasks (including a control or blank containing no adjuvant or Busan 20/20™ were closed with translucent caps and incubated at 80 F for 10 days with 18 hours/day of illumination by a combination of fluorescent grow lamps and standard incandescent lamps. The incubation time was 10 days. Growth was scored by visual observation on a 0-4 scale and the results are shown in Table 1 below. A score of "1" indicates that the flask is slightly green. A score of "2" indicates that bloom has begun. A score of "4" indicates that the flasks are too turbid to see through. Any score >1 is considered a preventative failure.

Table 1
Visual score - Preventive Algae Control

Example	Adjuvant	Adjuvant Conc. (ppm)	PHMB Conc. (ppm)	Average Visual Score	Comments
1	Dodecylamine	2.5	4.0	0	no visible growth
2	Dodecylamine	5.0	4.0	0	no visible growth
3	Dodecylamine	10.0	4.0	0	no visible growth
4	Dodecylamine	15.0	4.0	0	no visible growth
5	Busan 20/20™	10.0	4.0	0	no visible growth
6	Busan 20/20™	15.0	4.0	0	no visible growth
Control	None	0	4.0	4.0	very heavy growth
Control	None	0	0	4.0	very heavy growth

The data in Table 1 clearly illustrates the effectiveness of the combinations of PHMB and dodecylamine and PHMB and Busan 20/20™ over the PHMB, alone, at preventing the field isolated mustard algae outbreak from occurring.

Examples 7 to 12: Remedial Laboratory Studies on Algae

Pre-ample

Remedial treatments are intended to reduce a bloom of algae once it has already occurred. During blooms the algal infestation of the system is obvious, even to the casual observer. Effective remedial treatments are those that reduce the obvious symptoms, even if they do not result in a complete kill of the algae. Remedial treatments are considered effective if they return the system to a pre-bloom state.

Remedial efficacy was evaluated in this example using field isolated mustard algae. Any treatment showing good control of this organism is expected to display similar efficacy against green and black algae.

Experimental

Studies were conducted in 125 ml flasks containing 6mm borosilicate glass beads (50) and Jaworski's medium (50ml). The flasks were inoculated with pooled cultures of mustard algae to achieve an initial absorbance of 0.10, as measured using a Milton Roy Spec 20 Spectrophotometer. This concentration of algae in the water resulted in a noticeable green colour similar to that seen after brushing pools with moderate blooms. The adjuvants identified in Table 2 were added at levels of 1.25 and 2.5 ppm active ingredient. Busan 20/20™ identified in Table 3 was added at levels of 0.625, 1.25, 2.5 and 5.0 ppm. The performance of the adjuvants were compared to the controls with and

without PHMB. The flasks were closed using translucent caps, illuminated for 8 hours using a combination of fluorescent grow lamps and standard incandescent lamps each day and incubated at 80°F for a period of 5 days. Algal growth was measured after 5 days using a Milton Roy Spec 20 spectrophotometer. The higher the optical density the heavier the growth. Treatments that result in a terminal optical density of less than 0.2 display either algistatic or algicidal activity. The results are shown in Table 2.

Table 2
Remedial Algae Control

Example	Adjuvant	Adjuvant Conc. (ppm)	PHMB Conc. (ppm)	Average Optical Density	Comments
7	Dodecylamine (Armeen 12D™)	2.5	4.0	0.12	Control
8	Dodecylamine (Armeen 12D™)	1.25	4.0	0.08	Excellent Control
9	Octadecylamine (Armeen 18 D™)	2.5	4.0	0.08	Excellent Control
10	Octadecylamine (Armeen 18 D™)	1.25	4.0	0.16	Control
11	Dimethyloctadecylamine (Armeen DM 18D™)	2.5	4.0	0.07	Excellent Control
12	Dimethyloctadecylamine (Armeen DM 18D)	1.25	4.0	0.12	Control
Control	None	0	4.0	0.62	Very heavy growth
Control	None	0	0	0.48	Heavy growth

Footnote to Table 2: Armeen 12D, Armeen 18D and Armeen DM are trademark names for dodecylamine, octadecylamine and dimethyloctadecylamine ex Akzo Nobel.

The data in Table 2 shows that all of the combinations of adjuvants and PHMB were successful at significantly reducing the growth of the field isolated mustard algae and much more effective than the PHMB by itself. Also, there was no significant difference in the performance of the straight chained octadecylamine and dimethyloctadecylamine at 2.5 ppm.

Example 13: Effect of an Additional Polyquaternary Ammonium Compound on the Control of Algal Growth

The experiments described in Examples 7 to 9 were repeated except that in place of the dodecylamine Busan 20/20™ (a mixture of dodecylamine and a polyquaternary ammonium compound available under the trademark WSCP ex Buckman Laboratories Inc.) was used. The results are shown in Table 3.

Table 3

Remedial Algae Control

Example	Adjuvant	Conc (ppm)	PHMB Conc. (ppm)	Average Optical Density	Comments
13	Busan 20/20™	0.625	4.0	0.32	Moderate growth
14	Busan 20/20™	1.25	4.0	0.20	Slight growth
15	Busan 20/20™	2.5	4.0	0.16	Control
16	Busan 20/20™	5.0	4.0	0.12	Control
Control	None	0	4.0	0.81	Very heavy growth
Control	None	0	0	0.51	Heavy growth

The data in Table 3 shows that at concentrations of Busan 20/20™ greater than or equal to 1.25 ppm in combination with PHMB gave a significant improvement over PHMB alone.

Example 17: Effect of Adjuvant on Water Clarity

When treating recreational waters such as swimming pools or spas it is highly desirable to add an agent to the water which can be dosed in one application or will accumulate over time and will not adversely effect the water quality, for example clarity, colour, foaminess, or objectionable odour or taste. If swimming pool water is not clear it could present a hazard to swimmers who may not be able to see the pool's sides or bottom.

Experimental

Six 10 gallon fish aquariums equipped with a heater and a recirculating pump (to simulate a swimming pool environment) were filled with simulated swimming pool water containing polyhexamethylene biguanide (PHMB) comprising:

Sodium bicarbonate (total alkalinity)	80 - 150 ppm
Calcium chloride (hardness)	180 - 275 ppm
Hydrogen peroxide	25 - 30 ppm
Polyhexamethylene biguanide (PHMB)	6 - 12 ppm

5

To these tanks was added the adjuvant shown in Table 4. The pH of the tanks was maintained between 7.2 and 7.8 and the water temperature was maintained at 70 ± 3 °F. After the chemical additions the water was circulated for 24 hours. The water in each tank was then visually inspected and tested for turbidity using a Hach Turbidimeter. The results are shown in Table 4.

10

Table 4
Effect of Dodecylamine and Tetradecylamine on Water Clarity


Tank	Adjuvant	Adjuvant Concentration (ppm)	Turbidity (NTU)	Visual Observations
1	Control	0	2.3	Clear
2	Dodecylamine	2.5	2.7	Clear
3	Dodecylamine	5.0	1.8	Clear
4	Dodecylamine	10.0	2.5	Clear
5	Tetradecylamine	5.0	10.1	Cloudy
6	Tetradecylamine	10.0	19.0	Cloudy

15

The results in Table 4 clearly indicate that the dodecylamine had no effect on water clarity whereas tetradecylamine resulted in water turbidity.

CLAIMS

1. A method for inhibiting the growth of or killing microorganisms particularly, algae, bacteria, yeast, and/or fungi in a recirculating water system comprising adding to the water a polymeric biguanide and an adjuvant of the Formula (1) or a salt thereof:



Formula (1)

wherein:


R¹ is an optionally substituted C₈ to C₁₂ or C₁₈ to C₂₂ alkyl group; and
 R² and R³ each independently is H or optionally substituted C₁₋₄-alkyl.

2. A method according to claim 1 wherein the adjuvant is selected from the group consisting of dodecylamine, octadecylamine, N,N-dimethyloctadecylamine or a salt thereof.

3. A method according to claim 1 or claim 2 wherein the adjuvant is added to the recirculating water system to give a concentration thereof in the range 0.1 to 30 ppm, preferably 0.5 to 15ppm.

4. A method according to claim 3 wherein the adjuvant is added to the recirculating water system to give a concentration thereof in the range 5 to 15ppm, preferably 6 to 10ppm.


5. A method according to any one of the preceding claims wherein the polymeric biguanide contains at least two biguanide units of Formula (2):



Formula (2)

linked by a bridging group which contains at least one methylene group.

6. A method according to any one of the preceding claims wherein the polymeric biguanide is a mixture of polymer chains in which the individual polymer chains, excluding the terminating groups, are of the Formula (6) or a salt thereof:



Formula (6)

wherein n is from 4 to 40.

7. A method according to any one of the preceding claims wherein the polymeric biguanide is in the hydrochloride salt form.

8. A method according to any one of the preceding claims wherein the polymeric biguanide is added to the re-circulating water system to give a concentration thereof in the water of from 1 to 20 ppm.

9. A method according to claim 8 wherein the polymeric biguanide is added to the recirculating water system to give a concentration thereof in the water of from 5 to 12ppm, preferably 6 to 10ppm.


10. A method according to any one of the preceding claims wherein the polymeric biguanide and the adjuvant are added to the recirculating water system as a composition comprising the polymeric biguanide, the adjuvant and optionally a carrier.

11. A method according to claim 10 wherein the carrier is a water miscible organic solvent.

12. A method according to any one of the preceding claims which further comprises adding one or more further antimicrobial compound(s).

13. A method according to claim 12 wherein the further antimicrobial compound is a polyquaternary ammonium compound.

14. A method according to claim 13 wherein the polyquaternary ammonium compound comprises a repeat unit of the Formula (7):



Formula (7)

wherein:

R⁴, R⁵, R⁶ and R⁷ each independently is C₁₋₆-alkyl optionally substituted by hydroxy;

Q²⁻ is a divalent counter ion, two monovalent counter ions or a fraction of a polyvalent

5 counter ion sufficient to balance the cationic charge in the repeat unit; and

a, b and t each independently is 1 to 4.

10 15. A method according to claim 13 or 14 wherein the adjuvant and polyquaternary ammonium compound are added to the recirculating water system together as a formulation.

15 16. A method according to any one of the preceding claims, wherein the recirculating water system is selected from swimming pool systems, spa systems, heating systems, cooling systems, cooling towers, domestic central heating systems, and ornamental ponds.

20 17. A method for inhibiting the growth of or killing algae microorganisms particularly, bacteria, yeast, and/or fungi in a recirculating water system comprising adding to the water in either order or simultaneously:

(i) dodecylamine or a salt thereof ; and

(ii) a polymeric biguanide;

wherein the dodecylamine is added to the water system to give a concentration thereof of from 0.1 to 24ppm and the polymeric biguanide is added to the water system to give a concentration thereof of from 1 to 20 ppm.

25

18. A recirculating water system comprising :

(i) water, an adjuvant of the Formula (1) as defined in claim 1 and a polymeric biguanide; and

30 (ii) a means for recirculating the water; wherein the adjuvant and polymeric biguanide are dissolved in the water.

19. A kit for treating recirculating water comprising:

(i) an adjuvant of the Formula (1) as defined in claim 1 or a salt thereof;

(ii) a polymeric biguanide; and

35 (iii) instructions for adding (i) and (ii) to a recirculating water system.

20. A composition comprising:

(a) an adjuvant of the Formula (1) as defined in claim 1 or a salt thereof; and

(b) a polymeric biguanide.

21. A composition according to claim 20 wherein the adjuvant of Formula (1) is selected from the group consisting of dodecylamine, octadecylamine, N,N-dimethyloctadecylamine or a salt thereof.

5 22. A composition according to claim 20 or 21 wherein the weight ratio of component (a) to component (b) is 99:1 to 1:99, preferably from 4:1 to 1:4.

23. A composition according to claim 22 wherein the weight ratio of component (a) to component (b) is 1:2 to 2:1, preferably 1:1 to 2:1.

10

24. A composition according to any one of preceding claims 20 to 23 which further comprises a carrier.

25. A composition according to claim 24 which comprises:

15

(a) from 10 to 60 parts of a mixture of the compound of Formula (1) as defined in claim 1 and a polymeric biguanide; and

(b) from 40 to 90 parts of a carrier

wherein the parts (a) and (b) are by weight and the sum of the parts (a) and (b) = 100.

20

26. A composition according to claim 25 which comprises:

(a) from 5 to 30 weight % of the compound of Formula (1) as defined in claim 1 and 5 to 30 weight % polymeric biguanide; and

(b) from 90 to 60 weight % carrier.

25

27. A composition according to claim 24, 25 or 26 wherein the carrier comprises a water miscible organic solvent.

28. A composition according to any one of claims 20 to 27 which further comprises one or more further antimicrobial compound(s).

30

29. A composition according to claim 28, wherein the further antimicrobial compound(s) comprise from 5 to 50%, preferably from 10 to 30% by weight of the composition.

35

THIS PAGE BLANK (USPTO)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 December 2001 (13.12.2001)

PCT

(10) International Publication Number
WO 01/93684 A3

(51) International Patent Classification⁷: **A01N 47/44**.
C02F 1/50 // (A01N 47/44, 33:12, 33:04)

(74) Agents: **REVELL, Christopher** et al.; Intellectual Property Group, Avecia Limited, P.O. Box 42, Hexagon House, Blackley, Manchester M9 8ZS (GB).

(21) International Application Number: **PCT/GB01/02362**

(22) International Filing Date: **29 May 2001 (29.05.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(30) Priority Data:
60/209,230 **2 June 2000 (02.06.2000)** **US**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except MN, US*): **AVECIA INC.** [US/US]; 1405 Foulk Road, Wilmington, DE 19803 (US).

(71) Applicant (*for MN only*): **AVECIA LIMITED** [GB/GB]; P.O. Box 42, Hexagon House, Blackley, Manchester M9 8ZS (GB).

Published:

— *with international search report*


(88) Date of publication of the international search report:
16 May 2002

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **UNHOCH, Michael, Joseph** [US/US]; 235 Cherry Lane, Newcastle, DE 19720 (US). **VORE, Roy, Dean** [US/US]; 235 Cherry Lane, Newcastle, DE 19720 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **TREATMENT OF CIRCULATING WATER SYSTEMS**



(1)

(57) Abstract: The present invention relates to a method of inhibiting the growth of killing algae, bacteria, yeast and/or fungi in a recirculating water system which comprises adding to the water a polymeric biguanide and an adjuvant of the Formula (1) or a salt thereof: wherein: R¹ is an optionally substituted C₈ to C₁₂ or C₁₈ to C₂₂ alkyl group; and R² and R³ each independently is H or optionally substituted C₁₋₄-alkyl.

WO 01/93684 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/02362

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A01N47/44 C02F1/50 //(A01N47/44,33:12,33:04)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A01N C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 28091 A (BAUSCH & LOMB) 7 August 1997 (1997-08-07) page 1 -page 6; claims 1-12,14-16 ---	1,3-11, 16,18-20
Y	WO 98 00369 A (BUCKMAN LABOR INC) 8 January 1998 (1998-01-08) page 2, line 8 -page 4 page 7, line 5 - line 18 page 9, paragraph 2 page 11, last paragraph page 19, paragraph 2 - paragraph 3; claims 1,4,11-19 --- -/--	1-29



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

9 January 2002

Date of mailing of the international search report

24/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Muellners, W

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/02362

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>DATABASE WPI Section Ch, Week 199817 Derwent Publications Ltd., London, GB; Class A97, AN 1998-189101 XP002186957 & JP 10 045514 A (AQUAS KK), 17 February 1998 (1998-02-17) abstract</p>	1-29
A	<p>WO 98 52875 A (ZENECA LTD ;MCGEECHAN PAULA LOUISE (GB); VORE ROY (US); ZENECA INC) 26 November 1998 (1998-11-26) page 1 -page 3, line 29</p>	1-29
A	<p>US 2 393 293 A (CORLEY HOYT M) 22 January 1946 (1946-01-22) the whole document</p>	1-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 01/02362

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9728091	A	07-08-1997	AU 1688197 A WO 9728091 A1 US 5935518 A	22-08-1997 07-08-1997 10-08-1999
WO 9800369	A	08-01-1998	US 5866016 A AU 720577 B2 AU 3647097 A BR 9710205 A CA 2259384 A1 EP 0910552 A1 WO 9800369 A1	02-02-1999 08-06-2000 21-01-1998 10-08-1999 08-01-1998 28-04-1999 08-01-1998
JP 10045514	A	17-02-1998	CN 1173967 A	25-02-1998
WO 9852875	A	26-11-1998	AU 7439198 A WO 9852875 A1 ZA 9804175 A	11-12-1998 26-11-1998 23-11-1998
US 2393293	A	22-01-1946	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)